

FE3D16-20N





3-Wheels front drive Electric Forklift 1600-2000Kg

Highlights

High Speed & Efficiency

High Maneuverability

Best Cost-Performance Ratio

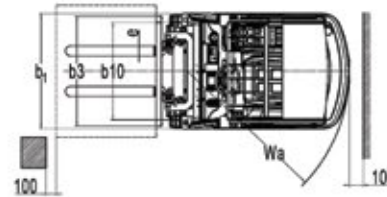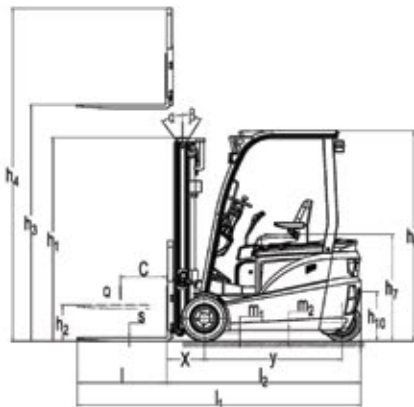

Designation	Lift height h3(mm)	Free Lift h2(mm)	Closed mast height h1(mm)	Extended mast height h4(mm)	Tilt forward/ backward $\alpha/\beta(^{\circ})$	Capacity table(kg) C=500mm without sideshift single tyres		
						FE3D16N	FE3D18N	FE3D20N
Two-stage ZT	2500	126	1758	3481	5/7	1600	1800	2000
	2700	126	1858	3001	5/7	1600	1800	2000
	3000	125	2008	3081	5/7	1600	1800	2000
	3300	125	2158	4201	5/7	1600	1800	2000
	3500	125	2258	4481	5/7	1600	1800	2000
	3700	125	2358	4681	5/7	1600	1800	2000
	4000	125	2558	4981	3/5	1500	1750	1900
	4300	125	2708	5281	3/5	1450	1650	1800
	4500	126	2806	5481	3/6	1400	1450	1600
5000	125	3083	5081	3/5	1000	1100	1400	
Two-stage ZZ	2500	793	1758	5474	5/7	1600	1800	2000
	2700	893	1858	3574	5/7	1600	1800	2000
	3000	1043	2008	3974	5/7	1600	1800	2000
	3300	1193	2158	4274	5/7	1600	1800	2000
	3500	1293	2258	4474	5/7	1600	1800	2000
	3700	1393	2358	4674	5/7	1600	1800	2000
	4000	1593	2558	4974	5/7	1500	1750	1900
	4300	1743	2706	5274	3/5	1450	1650	1800
	4500	1843	2808	5474	3/5	1400	1450	1600
5000	2118	3083	5974	3/5	1000	1100	1400	
Three-stage DZ	4000	988	1953	4900	3/5	1500	1750	1900
	4350	1113	2078	5329	3/5	1450	1600	1700
	4500	1163	2128	5479	3/5	1400	1450	1600
	4800	1263	2228	5779	3/5	1200	1300	1400
	5000	1363	2328	5979	3/5	1050	1100	1300
	5500	1513	2478	6479	3/5	800	900	1000
	6000	1713	2678	6565	3/5	600	650	700

Type sheet for industrial truck acc. to VDI 219

DISTINGUISHING MARK

1.2	Manufacturer's type designation		FE3D16N	FE3018N	FE3D20N
1.3	Drive electric battery or mains diesel petrol gas manual		electric	electric	electric
1.4	Type of operation hand pedestrian standing seated order-picker		seated	seated	seated
1.5	Load capacity rated load	Q(kg)	1600	1800	2000
1.6	Load centre distance	C(mm)	500	500	500
1.8	Load distance centre of drive axle to fork	x(mm)	372	377	377
1.9	wheelbase	y(mm)	1360	1360	1490

WEIGHT

2.1	Service weight incl battery see line 6.5	kg	3060	3160	3420
2.2	Axle loading laden front/rear	kg	4160/500	4450/510	4880/540
2.3	Axle loading unladen front/rear	kg	1470/1590	1530/1630	1670/1750

TIRES CHASSIS

3.1	Type solid rubber superelastic pneumatic polyurethane		superelastic	superelastic	superelastic
3.2	Tyres size front		18X7-8	18X7-8	200X50-10
3.3	Tyres size rear		15X4-8	15X4-8	15X4-8
3.5	Wheels number front/rear driven wheels		2x/2	2x/2	2x/2
3.6	Track width front	b10(mm)	960	960	984
3.7	Track width rear	b11(mm)	180	180	180

DIMENSIONS

4.1	Mast/fork carriage tilt forward/backward	α/β (o)	5/7	5/7	5/7
4.2	lowered mast height	h1(mm)	2008	2008	2008
4.3	Free lift	h2(mm)	125	125	125
4.4	Lift height	h3(mm)	3000	3000	3000
4.5	Extended mast height	h4(mm)	3981	3981	3981
4.7	Overhead load guardheight	h6(mm)	2075	2075	2075
4.8	Seat height/standing height	h7(mm)	1030	1030	1030
4.12	Coupling height	h10(mm)	465	465	465
4.19	Overall length	l1(mm)	2845	3000	3130
4.2	Length to face of forks	l2(mm)	1925	1930	2060
4.21	Overall width	b1(mm)	1135	1135	1135
4.22	Fork dimensions	s/e/l(mm)	35/100/920	40/120/1070	40/120/1070
4.24	Fork carriage width	b3(mm)	1040	1040	1040
4.31	Ground clearance laden under mast	m1(mm)	123	123	123
4.32	Ground clearance centre of wheelbase	m2(mm)	105	105	105
4.33	Aisle width for pallets 1000x1200 crossways	Ast(mm)	3248	3253	3383
4.34	Aisle width for pallets 800x1200 lengthways	Ast(mm)	3373	3377	3507
4.35	Turning radius	Wa(mm)	1550	1550	1680

PERFORMANCE

5.1	Travel speed laden/unladen	km/h	14/15	14/15	13/15
5.2	Lift speed laden/unladen	m/s	0.32/0.42	0.30/0.42	0.30/0.42
5.3	lowering speed laden/unladen	m/s	<600	<600	<600
5.5	Drawbar pull laden/unladen S2 60 min	N			
5.6	Max.drawbar pull laden/unladen S2 5 min	N	13000	14000	16000
5.7	Max. Gradient performance laden/unladen S2 5 min	%	15/20	15/20	13/18
5.1	Service brake		Hydraulic	Hydraulic	Hydraulic

ELECTRIC-ENGINE

6.1	Drive motor rating S2 60 min	kW	4.5X2	4.5X2	4.5X2
6.2	Lift motor rating at S3 15%	kW	8.6	8.6	8.6
6.3	Battery standard		DIN	DIN	DIN
6.4	Battery voltage nominal capacity KS	V/Ah	48/455 48/490(opt)	48/455 48/490(opt)	48/560 48/630 (optional)
6.5	Battery weight	kg	48/560(opt) 800	48/560(opt) 800	950
6.6	Battery dimensions l/w/h	mm	980x538x870	980x538x670	980x688x670

ADDITIONAL DATA

8.1	Type of drive control		AC	AC	AC
8.2	Operating pressure for attachments	Mpa	17.5	17.5	17.5
8.3	Oil volume for attachments	l/min	36	36	36
8.4	Sound level at driver's ear according to EN 12053	dB(A)	73	73	73

Marketed by:

Accurate Meezan Trading LLC

P.O.Box: 40646, Office # 1909, 19th Floor,

Churchill Tower 1 - Commercial, Business Bay, Dubai - U.A.E

Tel.: +971 4 3337789 / +971 4 3337790 Fax: +971 4 3336210

Email: info.amt@egkantawalla.com

Name & Address of Dealer:

