

Electric Pedestrian stacker

WS15H

Lifting height: 2000–3500 mm /
Load capacity: 1500 kg

Variable Speed Control

Intelligent & Efficient

Rugged & Durable

Easy & Comfortable



Variable Speed Control on Lifting & lowering

Comfortable and efficient thanks to patented intelligent handle and control system, ideal for replacing manual & semi-electric stackers, for light use in narrow warehouse environments with efficient and easy pallet stacking.

The proportional lowering brings high efficiency for exact pallet placement and more precise control when compared to the normal fixed speed of lifting & lowering.

Variable speed control by proportional control knob, keeps lifting and lowering smooth, stable, safe and energy saving.

Precise Control

Proportional lifting & lowering

The variable speed control ensures the stacker goes up and down smoothly, minimizing the mechanical shock and vibration, ensuring fragile loads are gently placed on racking or the floor, and reducing the impact of noise and vibration on operators.

Lowering buffering

Automatic lowering speed descent with soft buffering when the fork height is lowered to around 10cm from the ground, effectively protects the safety of the cargo, low noise and small vibration.

High efficiency

The variable speed control brings accurate response for adjusting the lifting & lowering speed according to the actual situation, the operator can easily complete the task and improve the working efficiency.

Energy saving

Compared to the traditional fixed lifting & lowering speed, variable speed can be adjusted according to the load and height by operator, reducing energy waste and improving energy utilization rate.

Longer service life

Variable speed control can reduce the mechanical impact and friction during lifting & lowering, reduce the wear and tear on the chassis, mast, bearings, and enable a longer service life.

Lowering
Speed
+30%

Manoeuvrability
+300%

Energy
Consumption
-15%



Intelligent & Efficient

multifunctional intelligent tiller handle is unique design for quick fault diagnosis, enabling an easier service, shorter service time and lowered labor costs.

Multifunctional intelligent tiller handle




Easy Maintenance

Serial communication technology

Single wiring harness communication from tiller handle to controller system. Simple, Durable and Stable.

UART

- ✓ Low after-sales service cost
- ✓ Quick & easy fault diagnosis
- ✓ Everyone can be an expert

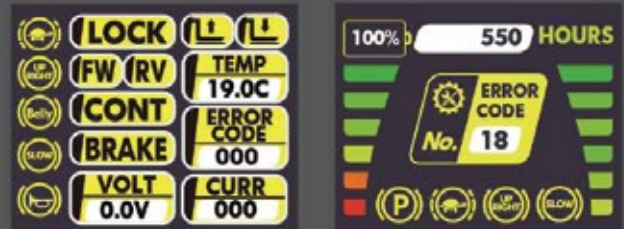

Operation status & fault diagnosis are integrated onto the tiller handle display for easy troubleshooting.

Operator Preferred

Turtle Speed 01



Enable operator to choose different speed modes based on their experience and the specific work environment.

Up-Right Drive 02



Easily maneuvered with the handle in the vertical position by pressing the turtle-speed button.


Engineering Mode (Brake Release) 03



When truck is down, release the brake to move the unit manually.

Rugged & Durable

Due to a high-strength frame and mast design and solid materials used, the deformation of the frame, mast, and forks is small.

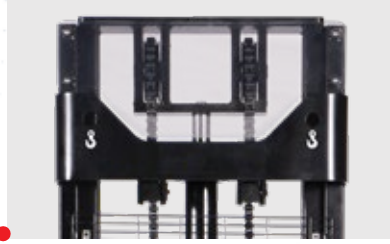

Double-chain design

Compared with single-chain design, it has higher strength, safer and more stable.

Small deformation of forks and masts, stable and durable

More stable when lifting & lowering with loads.

Full coverage protection on mast Standard equipped with cylinder explosion-proof valve

It can prevent accidents such as uncontrolled descent caused by unexpected rupture of oil pipes, ensuring stable descent of the load and personal safety, and preventing damage to equipment.



High-strength forks

The forks are formed in one piece with a thickness of 8mm steel. High strength and small deformation even under heavy loads.

The battery is fixed at the bottom of the frame Improved stability.

Battery low voltage protection

Effectively avoid battery over-discharge, ensuring a longer battery life.

Longer service life

Mast: Standard C+H channel steel
Frame: Steel plate thickness of 5mm
Frame bottom plate: 30mm integrated steel plate

Safe operation

Emergency reverse switch

In case of an emergency, it protects the operator and the surrounding personnel from harm.

Safety travel speed limit

When the fork is lifted to above 500mm, the driving speed automatically reduces to 2km/h to ensure the safety of operation at a high position in case of any misoperation.



Built-in charger

Hidden charging plug, high safety, the whole vehicle is powered off during charging, reducing safety hazards.

High lateral and longitudinal stability

Wider wheelbase and longer axle distance.

Adjustable balance wheel

Improved stability and maneuverability, suitable for different working scenarios.

The low ground clearance of 30 mm helps to reduce the risk of foot injuries



Easy & Comfortable



Effortless, easy to operate

Low-mounted longer tiller reduces steering force required.

Low mast static height

Easy to operate in containers and elevators with less than 3.3m lifting height.



The steering angle is designed to be above 180 degrees

Small turning radius.

Excellent maneuverability

Precise and maneuverable operating, high safety and efficiency.

Reasonable design of the balancing wheel eccentric distance.

Flexible direction commutation



Easy to recharge

Built-in charger and an external charging cable storage box for convenient charging.

Longer operating time

Standard 24V /71 Ah maintenance-free lead-acid battery, with the option of a larger capacity maintenance-free battery or a lithium battery.



Optional Configuration

Intelligent control

Unique in the market and very suitable for sorting operations on trucks. With a dedicated remote control device, the operator can control the forks to lift to the appropriate working height and carry out sorting operations, thus avoiding the need to use the handle buttons and bend over to pick up goods, improving operational efficiency and comfort.



- Lifting button
- Lowering button
- Max speed setting button
- Horn button



With the remote control device, you can easily set the speed suitable for the work, from level 1 speed to level 5 speed. Such speed transitions allow you to move the truck with controlled operation at ease.

Speed Level 1 Set



Speed Level 5 Set

• Reversing buzzer

• 24V /60Ah LiFePO4


• 24V/15A Charger
Lithium Battery Charger
Charging time: 4 hours





Specifications

MODEL		WS15H						
DISTINGUISHING MARKS								
1.3	Drive							Battery
1.4	Operator type							Pedestrian
1.5	Load capacity/rated load	Q	kg					1500
1.6	Load centre distance	c	mm					600
1.8	Load distance centre of drive axle to fork	x	mm					796
1.9	Wheelbase	y	mm					1204
WEIGHT								
2.1	Service weight (without battery)		kg	496.4	513.4	523.4	541.4	545.4
2.2	Service weight (with 25Ah battery)		kg	543	560	570	588	592
2.3	Service weight (with 80Ah battery)		kg	548	565	575	593	597
2.4	Axle loading laden front/rear		kg	603/1409				
2.5	Axle loading unladen front/rear		kg	384/129				
TIRES CHASSIS								
3.1	Wheels							Polyurethane
3.2	Wheel size front	Ø x width	mm					Ø210x70
3.3	Wheel size rear	Ø x width	mm					Ø80x70
3.4	Additional wheels (dimensions)	Ø x width	mm					Ø115x55
3.5	Wheels number front/rear (x = driven wheels)							1x + 1/4
3.6	Tread front	b10	mm					550
3.7	Tread rear 500/600 fork width	b11	mm					390/525
DIMENSIONS								
4.2	Lowered mast height	h1	mm	1480	1730	1980	2130	2230
4.4	Lifting height	h3	mm	2000	2500	3000	3300	3500
4.5	Extended mast height	h4	mm	2435	2935	3435	3735	3935
4.9	Height of tiller in driving position min/max	h14	mm	692/1255				
4.15	Height lowered	h13	mm	90				
4.19	Overall length 1150/1220 fork length	l1	mm	1710				
4.2	Length to face of forks	l2	mm	561.5				
4.21	Overall width	b1	mm	820				
4.22	Fork dimensions	a/b/l	mm	70x160x1150				
4.25	Width over forks	b5	b5(mm)	560/680				
4.32	Ground clearance centre of wheelbase	m2	m2(mm)	30				
4.34.1	Axle width for pallets 1000 x 1200 crossways	Ax1	Ax1(mm)	1997				
4.34.2	Axle width for pallets 800 x 1200 lengthways	Ax	Ax(mm)	1952				
4.35	Turning radius	Wa	Wa(mm)	1490				
PERFORMANCE DATA								
5.1	Travel speed with/without load		km/h	4/4.5				
5.2	Lift speed with/ without load		mm/s	0-87/ 0-130				
5.3	Lowering speed with/ without load		mm/s	27.8-137/22.5-167				
5.8	Max gradeability w/w/without load		%	05/15				
5.1	Service brake			Electromagnetic				
ELECTRIC-ENGINE								
6.1	Drive motor rating S2 60 min		kW	0.75				
6.2	Lift motor rating at S3 15%		kW	2.2				
6.4	Battery voltage/nominal capacity (K)		V/Wh	12/71 x 2 o (12/89 x 2				
6.5	Battery weight -5%		kg	23.2 x 2(71Ah)/o (25.8 x 2(89Ah)				
6.8	Energy consumption according to EN 16796		kWh	0.45				
ADDITION DATA								
8.1	Type of drive control			DC seed control				
8.4	Sound level at the driver's ear according to EN 12853 Controller		dB(A)	<75				

MAST DIMENSIONS							
WS15H			Duplex Mast				
h1	Lowered mast height	mm	1480	1730	1980	2130	2230
h3	Lift height	mm	2000	2500	3000	3300	3500
h4	Extended mast height	mm	2435	2935	3435	3735	3935

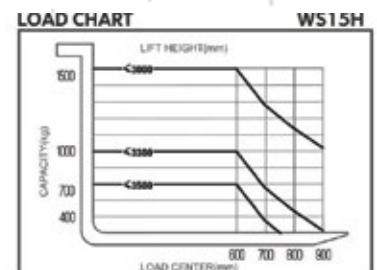

Dimensions

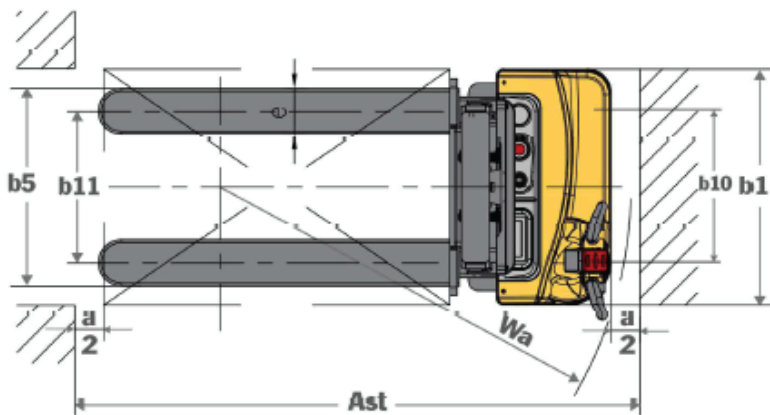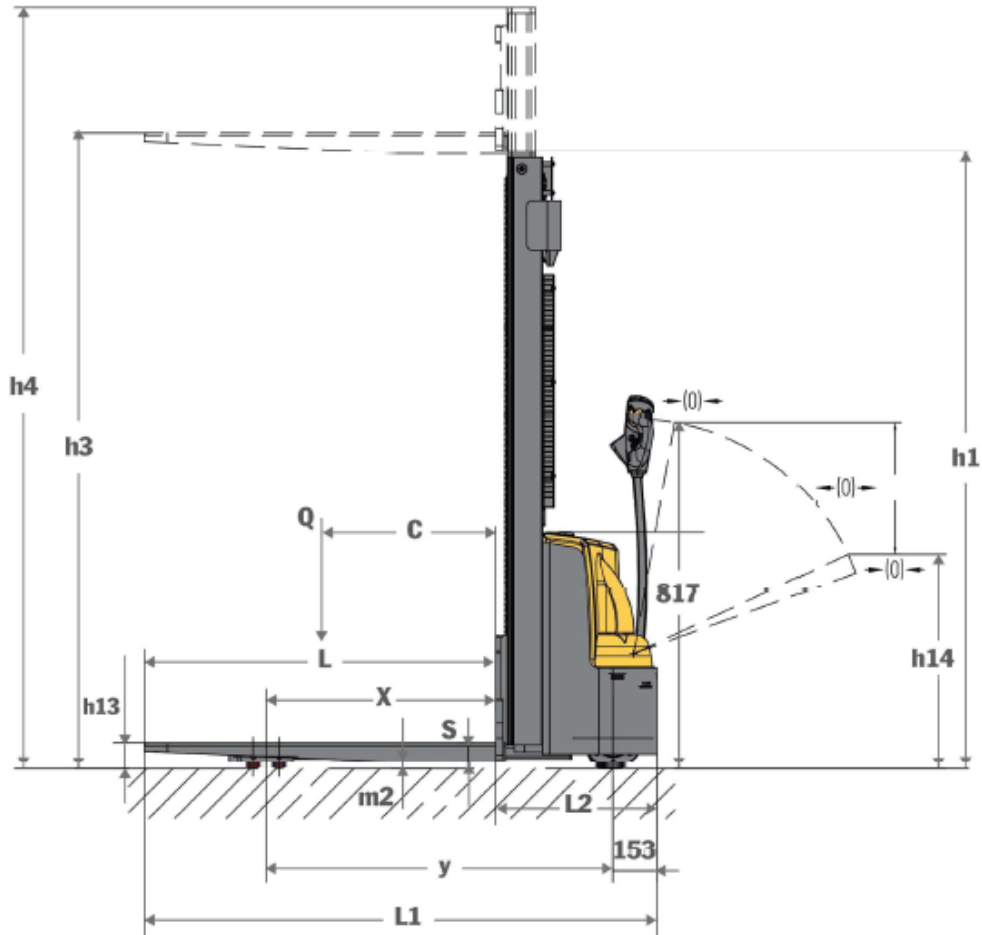

Marketed by:

Accurate Meezan Trading LLC

P.O.Box: 40646, Office # 1909, 19th Floor,
Churchill Tower 1 - Commercial, Business Bay, Dubai - U.A.E
Tel.: +971 4 3337789 / +971 4 3337790 Fax: +971 4 3336210
Email: info.amt@egkantawalla.com

Name & Address of Dealer:

